


Diffuser LED D01

Basic diffuser for LED profiles



- Available in two colours (opal and black)
- Fits many basic LED profiles
- Convenient, click-in installation
- Lengths of 9 and 15 m in rolls

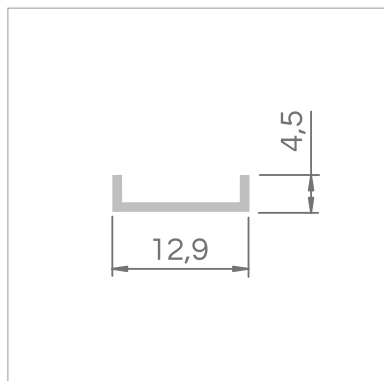

Diffuser LED D01	
material	PC
height	4,5 mm
width	12,9 mm
transmission	opal: 70±2,5%* black: 27±2,5%*
UV stabilization	yes
operating temperature	-100°C ~ +135°C
flammability class	UL-94 V-2


*Note: The values refer to measurements independent of the shape and colour of the LED profile.
The black anodized colour and deep profile can further reduce results.

Available colours and lengths


Diffuser LED D01				
length / colour	opal		black	
2.030 mm	D01200_O2		D01200_B2	
3.030 mm	D01201_O3		D01201_B3	
9,09 m roll	D01202_OR9		D01202_BR9	
15,15 m roll	D01203_OR15		D01203_BR15	

Fits LED profiles


MAGLYTE-10




BASELYTE-10 HIGH



BASELYTE-10 LOW



BASELYTE-10 LOW-IN



AVA LIGHT Sp. z o.o.

Ul. Staszica 40T/4, 05-500 Piaseczno, Poland | NIP 123-15-75-215 | www.avalight.pl

Warehouse / Magazyn: ul. Puławska 38, 05-500 Piaseczno, Poland